

# COMET S

## Overview of options

Whether fix mounting, tube mounting or magnetic fixing - the various versions of the LED beacon COMET S offer a solution for every requirement. Our COMET S has an impressively extra flat and modern design. Maximum light intensity (Class II homologation) and a fully lighted lamp dome ensure the best possible visibility and warning effect.



**Fix mounting**




**Magnetic fixing**



**Tube mounting**

## Fix mounting

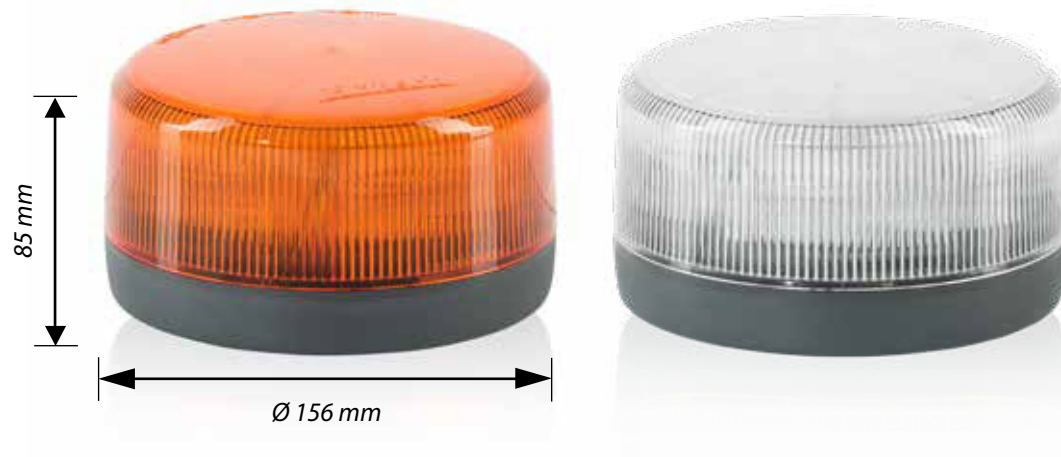

Also available with examination in accordance with ICAO type C.  
Further information can be found on page 61.

### PRODUCT FEATURES:

- Fix mounting in accordance with DIN 14620, form B1
- Various homologated flash patterns integrated
- Two rows of LEDs provide full-area illumination
- Class II homologation
- Options:
  - Day/night switching (via cable) for version with amber lamp dome
  - Day/night switching (automatic) for version with amber lamp dome
  - Convoy travel
  - Function monitoring
  - Analogue or CAN447 option
  - Also available with clear lamp dome
  - Soft light signal (night) possible
- Colours: also available in blue, red and green

<b>Technical data:</b>	
Designation:	COMET S
Voltage:	9-32V multi voltage
Flash frequency:	> 2 Hz
Average power consumption:	12 V: 1.3 A / 24 V: 0.7 A
Material:	Lamp dome: PC / socket: ASA
Type of protection:	IP5K4K/IPX9K
<b>Homologation: (Germany and international)</b>	
Light in accordance with ECE-R65:	TA2(E1)00 4426/ TA1(E1)00 4591
EMC in accordance with ECE-R10:	(E1) 10R-05 7965

# COMET S

## Magnetic fixing



### PRODUCT FEATURES:

- With spiral cable and triple magnetic fixing
- Optimum bonding even on curved vehicle roofs
- Rubber-coated magnets to protect paintwork from scratches
- Tested at up to 250 km/h
- Analogue control
- Various homologated flash patterns integrated
- Two rows of LEDs provide full-area illumination
- Options:
  - Day/night switching (automatic) for version with amber lamp dome
  - Also available with clear lamp dome
  - Soft light signal (night) possible
- Colours: also available in blue and red

## Tube mounting



### PRODUCT FEATURES:

- For fitting on a mounting tube in accordance with DIN 14620
- Impact-resistant housing base
- Various homologated flash patterns integrated
- Two rows of LEDs provide full-area illumination
- Options:
  - Day/night switching (automatic) for version with amber lamp dome
  - Flexible (AF) or fixed tube (A)
  - Also available with clear lamp dome
  - Soft light signal (night) possible
- Colours: also available in blue and red

Also available with examination in accordance with ICAO type C.  
Further information can be found on page 61.